

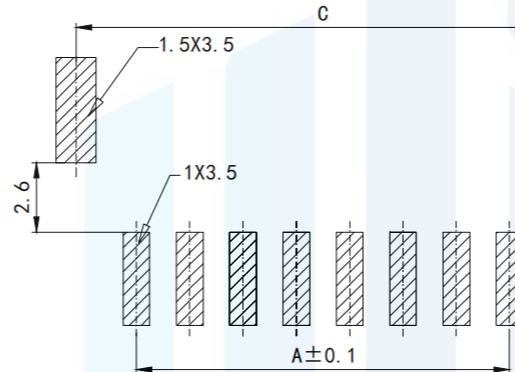
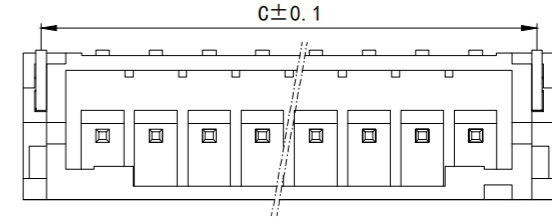


RoHS2.0
Compliant

孔数	尺寸 (mm)		
	A	B	C
2	2	4.8	7.95
3	4	6.8	9.95
4	6	8.8	11.95
5	8	10.80	13.95
...
20	38	40.80	43.95

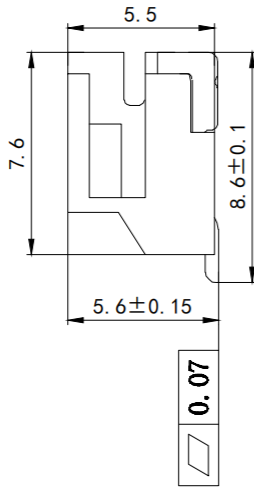

RECOMMENDED P.C. BOARD LAYOUT

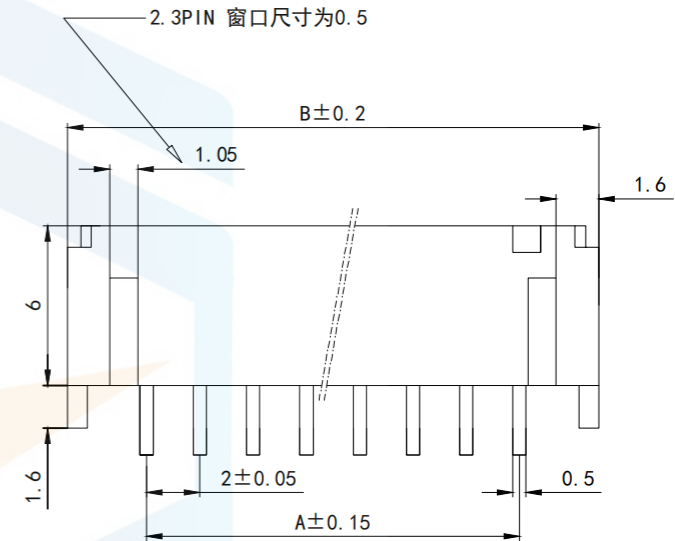

Specifications/ Technical Specifications

Current rating: 2A Current rating: 2A
 Voltage rating: 125 V AC, DC
 Rated voltage :126V AC, DC
 Insulation Resistance: 1000MO Min.
 Insulation resistance: minimum 1000MR
 Dielectric Withstanding:
 Withstand voltage :800VAC 1 min
 800V AC1 Min
 Contact Resistance
 : Contact resistance: Max. 20m90perating
 Temperature:-25'C to +85C
 Operating temperature : -25-C to 85° C
 20m2 Max.
 Materials/Material: Contact Material: Brass(Sn
 plating) Materials/Material: Contact material:
 brass (SN plating)
 Soldering Terminal: Brass(Sn plating)
 Solder material: Brass (tinned)
 Insulation Material: LCP UL94V-0
 Vitriol material, LCP UL94 V-0

TOLERANCE	X. XXX	±0.05		东莞市恒祺电子科技有限公司 Dongguan Hengqi Electronic Technology Co., Ltd	
	X. XX	±0.15		https://www.hq-dz.com phone:15812872448	
PROTECTON 	X. X	±0.20	TITLE: 针座		PART NO:PH-2.0卧贴-XXX
	X.	±0.30	DRAWN: DATE: 18-10-08		DRAWING NO:2*2.0*针位
	ANGLE	±5.0°	CHECKED: DATE: 18-10-08		UNIT: mm
			APPROVED: DATE: 18-10-08		SCALE: FULL
					SIZE: A4